

**Model** **Freestanding Tailgate  
Manhattan Base**



**Standard Options:**  
Vertical Wire Manager  
Media Box

**MNT, MNT2**

Column uprights are constructed of 14 gauge seam-welded cold rolled steel tube with the column being 2.0 in.O.D. The feet are ¼" thick solid steel plate formed to shape and supported by a 3/16" thick vertical steel web. Once formed and punched the feet slide over the column, and put in place, then are welded to their permanent position. All welds occur under the foot so there are no visible welds from eye level. The dimension of the foot varies with table size. Levellers or casters are threaded into solid ½" Dia Steel machined to accept 5/16" -18 threads. A solid ¼" thick steel 9" x 9" mounting plate is welded to the top of the column, then drilled to accept 8 #10- 7/8" deep threaded woodscrews.

**Tops**

Laminate

Constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/16" high-pressure plastic laminate sheet on top and a plastic laminate backing sheet below for a sandwich top thickness of 1 1/8". The core is manufactured with 100% recycled material and is manufactured inside a FSC Certified manufacturing facility. The top density is 39 pounds per sq. in. The top edge is routed to accept our PVC molding (Flat, Bullnose or Rigid) to match or accent the top, or self edge and further bonded in place with a water based white glue.

Veneer

Veneer tables are offered constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/32" hand laid up flat cut veneer on top and bottom for a sandwich top thickness of 1 1/16". Veneers are selected with careful attention to grain matching and symmetry. The table edge is finished with one of several hardwood edge profiles.

**Edges**

2MM Edge

2mm edges are made from pellet material that is melted and extruded through a die-head profile. The edge is glued to the core material and trimmed into place with an edge bander. 2mm Bio edge has a biobased content of 88% that is made from rapidly renewable corn; the portion of the corn used is a waste bi-product and therefore not taken from food stock. 2mm PVC edge is a polyvinyl chloride extruded plastic edge.

PVC Edge

Edges are made from PolyCor G92B poly-vinyl choride (PVC) pellet material melted and extruded through one of several die-head profiles. The matching or accented PVC edge is both glued and fitted to the table core using a continuous tongue and groove system around the circumference of the table.

Hardwood Edges

Spec hardwood edges are individually segmented, glued, using water based glues, and then clamped to the edges of the tables to assure 100% surface coverage of the glue both on the tabletop and the hardwood edge. After clamping to ensure a tight and permanent bond, the edges are then machined and hand-planed to match the exact thickness of the tabletop. All corners are mitered then pencil radiused before being sealed, stained and lacquered.

**Trough**

The Tailgate trough is comprised of three major components. The door is fabricated from an aluminum extrusion and is connected to the metal trough by dual hinges. The hinged is constructed from an assembly of parts made from glass filled nylon and steel. The trough itself is made from bent sheet metal that has cutouts to allow for data/communication and power.

**Optional Vertical Wire Manager**

1/16" Extruded aluminum forms the door and the outer shell of the Vertical Wire Manager. The door is connected to the outer shell with a ball and socket hinged joint. The Vertical Wire Manager attaches to the table leg column with two zinc die cast U-clips that are mechanically fastened to the outer shell. The door closes with a friction fit.

**Optional Media Box**

Is formed from 1/16" sheet Metal in the shape of a basket.



**Model** Freestanding Tailgate  
Manhattan Rectangular Base

**Standard Options:**

Media Box

**MRT, MRT2**

Column uprights are constructed of 14 gauge seam-welded cold rolled steel tube with the column being 2.0" x 4.0". The feet are ¼" thick solid steel plate formed to shape and supported by a 3/16" thick vertical steel web. Once formed and punched the feet are aligned over the column, and put in place, then are welded to their permanent position. All welds occur under the foot so there are no visible welds from eye level. The dimension of the foot varies with table size. Levellers or casters are threaded into solid ½" Dia Steel machined to accept 5/16" -18 threads. A solid ¼" thick steel 9" x 9" mounting plate is welded to the top of the column, then drilled to accept 8 #10- 7/8" deep threaded woodscrews.

**Tops**

Laminate

Constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/16" high-pressure plastic laminate sheet on top and a plastic laminate backing sheet below for a sandwich top thickness of 1 1/8". The core is manufactured with 100% recycled material and is manufactured inside a FSC Certified manufacturing facility. The top density is 39 pounds per sq. in. The top edge is routed to accept our PVC molding (Flat, Bullnose or Rigid) to match or accent the top, or self edge and further bonded in place with a water based white glue.

Veneer

Veneer tables are offered constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/32" hand laid up flat cut veneer on top and bottom for a sandwich top thickness of 1 1/16". Veneers are selected with careful attention to grain matching and symmetry. The table edge is finished with one of several hardwood edge profiles.

**Edges**

2MM Edge

2mm edges are made from pellet material that is melted and extruded through a die-head profile. The edge is glued to the core material and trimmed into place with an edge bander. 2mm Bio edge has a biobased content of 88% that is made from rapidly renewable corn; the portion of the corn used is a waste bi-product and therefore not taken from food stock. 2mm PVC edge is a polyvinyl chloride extruded plastic edge.

PVC Edge

Edges are made from PolyCor G92B poly-vinyl choride (PVC) pellet material melted and extruded through one of several die-head profiles. The matching or accented PVC edge is both glued and fitted to the table core using a continuous tongue and groove system around the circumference of the table.

Hardwood Edges

Spec hardwood edges are individually segmented, glued, using water based glues, and then clamped to the edges of the tables to assure 100% surface coverage of the glue both on the tabletop and the hardwood edge. After clamping to ensure a tight and permanent bond, the edges are then machined and hand-planed to match the exact thickness of the tabletop. All corners are mitered then pencil radiused before being sealed, stained and lacquered.

**Trough**

The Tailgate trough is comprised of three major components. The door is fabricated from an aluminum extrusion and is connected to the metal trough by dual hinges. The hinged is constructed from an assembly of parts made from glass filled nylon and steel. The trough itself is made from bent sheet metal that has cutouts to allow for data/communication and power.

**Optional Vertical Wire Manager**

1/16" Extruded aluminum forms the door and the outer shell of the Vertical Wire Manager. The door is connected to the outer shell with a ball and socket hinged joint. The Vertical Wire Manager attaches to the table leg column with two zinc die cast U-clips that are mechanically fastened to the outer shell. The door closes with a friction fit.

**Optional Media Box**

Is formed from 1/16" sheet Metal in the shape of a basket.



**Model**                      **Freestanding Tailgate  
Plinth Base  
Trough**

**Standard Options:**  
Media Box

**TGRE, TGSQ**                      Panels are made using a 3/4" thick 9 ply plywood core, covered and bonded with a water-based glue to a 1/16" high-pressure laminate sheet or laid up veneer on top. A Cam lock removable door is cut out of 1 of the 4 sides allowing access to both power/ communication modules and floor monuments. A key hole is routed above the door to allow wire pass through to the center of the table. A 3/4" particle board core is cut and fasted to the sides 2" oversized to the side panels. Side panels are tied together with a shaped 1/4" thick steel plate.

**Tops**  
Laminate                      Constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/16" high-pressure plastic laminate sheet on top and a plastic laminate backing sheet below for a sandwich top thickness of 1 1/8". The core is manufactured with 100% recycled material and is manufactured inside a FSC Certified manufacturing facility. The top density is 39 pounds per sq. in. The top edge is routed to accept our PVC molding (Flat, Bullnose or Rigid) to match or accent the top, or self edge and further bonded in place with a water based white glue.

Veneer                      Veneer tables are offered constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/32" hand laid up flat cut veneer on top and bottom for a sandwich top thickness of 1 1/16". Veneers are selected with careful attention to grain matching and symmetry. The table edge is finished with one of several hardwood edge profiles.

**Edges**  
2MM Edge                      2mm edges are made from pellet material that is melted and extruded through a die-head profile. The edge is glued to the core material and trimmed into place with an edge bander. 2mm Bio edge has a biobased content of 88% that is made from rapidly renewable corn; the portion of the corn used is a waste bi-product and therefore not taken from food stock. 2mm PVC edge is a polyvinyl chloride extruded plastic edge.

PVC Edge                      Edges are made from PolyCor G92B poly-vinyl choride (PVC) pellet material melted and extruded through one of several die-head profiles. The matching or accented PVC edge is both glued and fitted to the table core using a continuous tongue and groove system around the circumference of the table.

Hardwood Edges                      Spec hardwood edges are individually segmented, glued, using water based glues, and then clamped to the edges of the tables to assure 100% surface coverage of the glue both on the tabletop and the hardwood edge. After clamping to ensure a tight and permanent bond, the edges are then machined and hand-planed to match the exact thickness of the tabletop. All corners are mitered then pencil radiused before being sealed, stained and lacquered.

**Trough**                      The Tailgate trough is comprised of three major components. The door is fabricated from an aluminum extrusion and is connected to the metal trough by dual hinges. The hinged is constructed from an assembly of parts made from glass filled nylon and steel. The trough itself is made from bent sheet metal that has cutouts to allow for data/communication and power.

**Optional Media Box**                      Is formed from 1/16" sheet Metal in the shape of a basket.

**Model**                      **Freestanding Boardroom Table  
Plinth Base**



**PLRE, PLSQ**                      Panels are made using a 3/4" thick 9 ply plywood core, covered and bonded with a water-based glue to a 1/16" high-pressure laminate sheet or laid up veneer on top. A Cam lock removable door is cut out of 1 of the 4 sides allowing access to both power/ communication modules and floor monuments. A key hole is routed above the door to allow wire pass through to the center of the table. A 3/4" particle board core is cut and fasted to the sides 2" oversized to the side panels. Side panels are tied together with a shaped 1/4" thick steel plate.

**Tops**  
Laminate                      Constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/16" high-pressure plastic laminate sheet on top and a plastic laminate backing sheet below for a sandwich top thickness of 1 1/8". The core is manufactured with 100% recycled material and is manufactured inside a FSC Certified manufacturing facility. The top density is 39 pounds per sq. in. The top edge is routed to accept our PVC molding (Flat, Bullnose or Rigid) to match or accent the top, or self edge and further bonded in place with a water based white glue.

Veneer                      Veneer tables are offered constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/32" hand laid up flat cut veneer on top and bottom for a sandwich top thickness of 1 1/16". Veneers are selected with careful attention to grain matching and symmetry. The table edge is finished with one of several hardwood edge profiles.

**Edges**  
2MM Edge                      2mm edges are made from pellet material that is melted and extruded through a die-head profile. The edge is glued to the core material and trimmed into place with an edge bander. 2mm Bio edge has a biobased content of 88% that is made from rapidly renewable corn; the portion of the corn used is a waste bi-product and therefore not taken from food stock. 2mm PVC edge is a polyvinyl chloride extruded plastic edge.

PVC Edge                      Edges are made from PolyCor G92B poly-vinyl choride (PVC) pellet material melted and extruded through one of several die-head profiles. The matching or accented PVC edge is both glued and fitted to the table core using a continuous tongue and groove system around the circumference of the table.

Hardwood Edges                      Spec hardwood edges are individually segmented, glued, using water based glues, and then clamped to the edges of the tables to assure 100% surface coverage of the glue both on the tabletop and the hardwood edge. After clamping to ensure a tight and permanent bond, the edges are then machined and hand-planed to match the exact thickness of the tabletop. All corners are mitered then pencil radiused before being sealed, stained and lacquered.

**Model** **Tailgate with Media Wall  
Manhattan Base**

**Standard Options:**  
Vertical Wire Manager  
Media Box



**MNT, MNT2** Column uprights are constructed of 14 gauge seam-welded cold rolled steel tube with the column being 2.0 in.O.D. The feet are ¼" thick solid steel plate formed to shape and supported by a 3/16" thick vertical steel web. Once formed and punched the feet slide over the column, and put in place, then are welded to their permanent position. All welds occur under the foot so there are no visible welds from eye level. The dimension of the foot varies with table size. Levellers or casters are threaded into solid ½" Dia Steel machined to accept 5/16" -18 threads. A solid ¼" thick steel 9" x 9" mounting plate is welded to the top of the column, then drilled to accept 8 #10- 7/8" deep threaded woodscrews.

**Tops**  
Laminate Constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/16" high-pressure plastic laminate sheet on top and a plastic laminate backing sheet below for a sandwich top thickness of 1 1/8". The core is manufactured with 100% recycled material and is manufactured inside a FSC Certified manufacturing facility. The top density is 39 pounds per sq. in. The top edge is routed to accept our PVC molding (Flat, Bullnose or Rigid) to match or accent the top, or self edge and further bonded in place with a water based white glue.

Veneer Veneer tables are offered constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/32" hand laid up flat cut veneer on top and bottom for a sandwich top thickness of 1 1/16". Veneers are selected with careful attention to grain matching and symmetry. The table edge is finished with one of several hardwood edge profiles.

**Edges**  
2MM Edge 2mm edges are made from pellet material that is melted and extruded through a die-head profile. The edge is glued to the core material and trimmed into place with an edge bander. 2mm Bio edge has a biobased content of 88% that is made from rapidly renewable corn; the portion of the corn used is a waste bi-product and therefore not taken from food stock. 2mm PVC edge is a polyvinyl chloride extruded plastic edge.

**Media Wall** The Media Wall is fabricated from two rectangular cores that act as the substrate of the panels with an aluminum extrusion trim that frame the panel. The core is constructed of 1/2" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/16" high-pressure plastic laminate sheet.

**Trough** The Tailgate trough is comprised of three major components. The door is fabricated from an aluminum extrusion and is connected to the metal trough by dual hinges. The hinged is constructed from an assembly of parts made from glass filled nylon and steel. The trough itself is made from bent sheet metal that has cutouts to allow for data/communication and power.

**Optional Vertical Wire Manager** 1/16" Extruded aluminum forms the door and the outer shell of the Vertical Wire Manager. The door is connected to the outer shell with a ball and socket hinged joint. The Vertical Wire Manager attaches to the table leg column with two zinc die cast U-clips that are mechanically fastened to the outer shell. The door closes with a friction fit.

**Optional Media Box** Is formed from 1/16" sheet Metal in the shape of a basket.



**Model** Tailgate with Media Wall  
Manhattan Rectangular Base

**Standard Options:**  
Media Box

**MRT, MRT2** Column uprights are constructed of 14 gauge seam-welded cold rolled steel tube with the column being 2.0" x 4.0". The feet are ¼" thick solid steel plate formed to shape and supported by a 3/16" thick vertical steel web. Once formed and punched the feet are aligned over the column, and put in place, then are welded to their permanent position. All welds occur under the foot so there are no visible welds from eye level. The dimension of the foot varies with table size. Levellers or casters are threaded into solid ½" Dia Steel machined to accept 5/16" -18 threads. A solid ¼" thick steel 9" x 9" mounting plate is welded to the top of the column, then drilled to accept 8 #10- 7/8" deep threaded woodscrews.

**Tops**  
Laminate Constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/16" high-pressure plastic laminate sheet on top and a plastic laminate backing sheet below for a sandwich top thickness of 1 1/8". The core is manufactured with 100% recycled material and is manufactured inside a FSC Certified manufacturing facility. The top density is 39 pounds per sq. in. The top edge is routed to accept our PVC molding (Flat, Bullnose or Rigid) to match or accent the top, or self edge and further bonded in place with a water based white glue.

**Veneer** Veneer tables are offered constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/32" hand laid up flat cut veneer on top and bottom for a sandwich top thickness of 1 1/16". Veneers are selected with careful attention to grain matching and symmetry. The table edge is finished with one of several hardwood edge profiles.

**Edges**  
2MM Edge 2mm edges are made from pellet material that is melted and extruded through a die-head profile. The edge is glued to the core material and trimmed into place with an edge bander. 2mm Bio edge has a biobased content of 88% that is made from rapidly renewable corn; the portion of the corn used is a waste bi-product and therefore not taken from food stock. 2mm PVC edge is a polyvinyl chloride extruded plastic edge.


**Media Wall** The Media Wall is fabricated from two rectangular cores that act as the substrate of the panels with an aluminum extrusion trim that frame the panel. The core is constructed of 1/2" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/16" high-pressure plastic laminate sheet.

**Trough** The Tailgate trough is comprised of three major components. The door is fabricated from an aluminum extrusion and is connected to the metal trough by dual hinges. The hinged is constructed from an assembly of parts made from glass filled nylon and steel. The trough itself is made from bent sheet metal that has cutouts to allow for data/communication and power.

**Optional Media Box** Is formed from 1/16" sheet Metal in the shape of a basket.



**Model** Tailgate with Media Wall  
Plinth Base

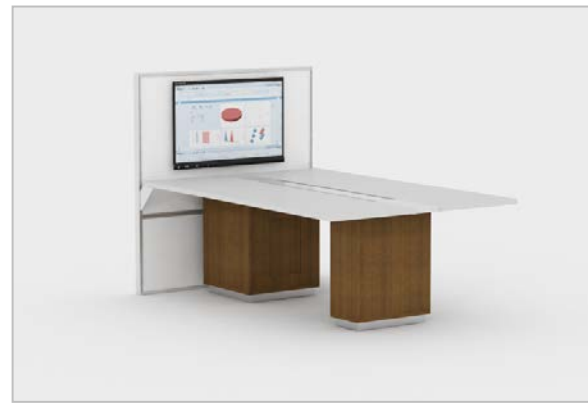

**Standard Options:**

Media Box

**TGRE, TGSQ**

Panels are made using a 3/4" thick 9 ply plywood core, covered and bonded with a water-based glue to a 1/16" high-pressure laminate sheet or laid up veneer on top. A Cam lock removable door is cut out of 1 of the 4 sides allowing access to both power/ communication modules and floor monuments. A key hole is routed above the door to allow wire pass through to the center of the table. A 3/4" particle board core is cut and fasted to the sides 2" oversized to the side panels. Side panels are tied together with a shaped 1/4" thick steel plate.

**Tops**

Laminate

Constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/16" high-pressure plastic laminate sheet on top and a plastic laminate backing sheet below for a sandwich top thickness of 1 1/8". The core is manufactured with 100% recycled material and is manufactured inside a FSC Certified manufacturing facility. The top density is 39 pounds per sq. in. The top edge is routed to accept our PVC molding (Flat, Bullnose or Rigid) to match or accent the top, or self edge and further bonded in place with a water based white glue.

Veneer

Veneer tables are offered constructed of 1" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/32" hand laid up flat cut veneer on top and bottom for a sandwich top thickness of 1 1/16". Veneers are selected with careful attention to grain matching and symmetry. The table edge is finished with one of several hardwood edge profiles.

**Edges**

2MM Edge

2mm edges are made from pellet material that is melted and extruded through a die-head profile. The edge is glued to the core material and trimmed into place with an edge bander. 2mm Bio edge has a biobased content of 88% that is made from rapidly renewable corn; the portion of the corn used is a waste bi-product and therefore not taken from food stock. 2mm PVC edge is a polyvinyl chloride extruded plastic edge.

**Media Wall**

The Media Wall is fabricated from two rectangular cores that act as the substrate of the panels with an aluminum extrusion trim that frame the panel. The core is constructed of 1/2" NAUF (no added urea-formaldehyde) particle board (Phase 2 CARB compliant) core, covered and bonded with a water-based glue to a 1/16" high-pressure plastic laminate sheet.

**Trough**

The Tailgate trough is comprised of three major components. The door is fabricated from an aluminum extrusion and is connected to the metal trough by dual hinges. The hinged is constructed from an assembly of parts made from glass filled nylon and steel. The trough itself is made from bent sheet metal that has cutouts to allow for data/communication and power.

**Optional Media Box**

Is formed from 1/16" sheet Metal in the shape of a basket.