


VINYL SEATING

**Lara
Grade 1**


[Click here to order memo samples for your specific project.](#)

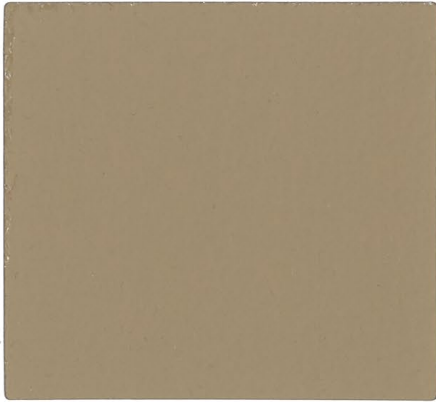


LRA 50 Stone



LRA 51 Bisque




LRA 52 Blush



LRA 53 Opulent



LRA 54 Tonic




LRA 55 Finch



LRA 56 Marmalade



LRA 57 Miso



LRA 58 Chill



LRA 59 Lace



LRA 60 Buttercup



LRA 61 Salsa



LRA 62 Red Earth



LRA 63 Angora



LRA 64 Pear



LRA 65 Marigold



LRA 66 Spice



LRA 67 Tamale



LRA 68 Vicuna



LRA 69 Taupe



LRA 70 Cashew



LRA 71 Plum



LRA 72 Port



LRA 73 Pumice



LRA 74 Timberland



LRA 75 Tawny



LRA 76 Velvet



LRA 77 Cordovan

Click here to order memo samples for your specific project.



LRA 78 Barre



LRA 79 Cloud



LRA 80 Tint



LRA 81 Athens



LRA 82 Titanium



LRA 83 Minty



LRA 84 Blue Ice



LRA 85 Lake



LRA 86 Gate



LRA 87 Haze



LRA 88 Hydro



LRA 89 Champion



LRA 90 Bahama



LRA 91 Kitten



LRA 92 Mink



LRA 93 Clover



LRA 94 Patriot



LRA 95 Tranquil



LRA 96 Hearth



LRA 97 Barista



LRA 98 Vine



LRA 99 Mid-Blue



LRA 100 Wizard



LRA 101 Tempest



LRA 102 Espresso



LRA 103 Sherwood



LRA 104 Evening



LRA 105 Mystery



LRA 106 Java



LRA 107 Pitch

Lara

Grade 1

VINYL SEATING

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluid barrier
- Bleach-solution cleanable
- Enhanced fade resistance

Environmental

- GREENGUARD Certified
- No added flame retardants
- No added antimicrobials
- Formulated without phthalates

Cleaning and Maintenance

Cleaning code: **(W)** Clean with water-based foam or water-based cleaners only. Do not use solvents.

Bleach solutions of up to 10% may be used for cleaning difficult stains.

For additional cleaning information visit cfstinson.com

For complete specifications visit cfstinson.com

Dye lots may vary slightly from samples shown.

*This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

* Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications



Content	Vinyl with Polyester Backing
Finish	Advanced Soil & Stain Protection
Weight	28 oz. +/- 1.0 oz. per linear yard
Width	54"

Performance Characteristics

Abrasion Resistance [†] ASTM D4157	Exceeds 1,300,000 double rubs - Heavy Duty
Adhesion CFFA-3	Warp: 4 lbs./in. min., Fill: 4 lbs./in. min.
Break Strength CFFA-17	Warp: 85 lbs. min., Fill: 75 lbs. min.
Tear Strength CFFA-16	Warp: 20 lbs. min., Fill: 27 lbs. min.
Seam Strength CFFA-14	Warp: 35 lbs. min., Fill: 30 lbs. min.
Colorfastness to Light CFFA-2	650 Hrs, Class 4 min.
Fluid Barrier	Inherent Fluid Barrier

Flammability*

California TB 117 - 2013, Section 1	Passes
NFPA 260	Class 1
BIFMA	Class A
UFAC	Class 1



SPEC FURNITURE INC.

Tel: 416 246 5540 Fax: 416 246 5549
Toll Free: 1 888 761 7732
specit@specfurniture.com
www.specfurniture.com



C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

W cfstinson.com
P 800 841 6279
F 248 299 3884